

BRUKSANVISNING INSTRUCTION MANUAL

ART NO.: 401021/401023

TREND®

B E L Y S N I N G

2700K 380LM 220~240V
50/60Hz 180mA LED 8W IP44



RoHS




DIM

IP44



SOLID OG STILIG DOWNLIGHT. DOWNLIGHTEN KAN DIMMES
HELT NED FLIMMERFRITT.
LAV HØYDE.
EKSTERN DRIVER MED HURTIGKOBLING FOR RASKERE OG
ENKLERE INSTALLASJON.
DIMBAR. 5 ÅRS GARANTI PÅ DRIVER!
ENKEL INSTALLERING. MONTERES UTEN VERKTØY.

SOLID AND CLASSY DOWNLIGHT. THE DOWNLIGHT CAN BE
DIMMED COMPLETELY FLICKER-FREE.
LOW HEIGHT.
EXTERNAL DRIVER WITH QUICK CONNECTION FOR FASTER AND
EASIER INSTALLATION.
DIMMABLE. 5 YEAR WARRANTY ON THE DRIVER!
EASY INSTALLATION. INSTALL WITHOUT TOOLS.





LED EFFEKT:
LYSSTYRKE:
FARGETEMPERATUR:
LYS SPREDNING:
VINKLING/TILT:
TETTHETSGRAD:
LEVERES MED DIMMBAR DRIVER.

8W
530LM
2700K
38°
25°
IP44






LED POWER:
LUMINOUS EFFICIENCY:
COLOR TEMPERATURE:
BEAM ANGLE:
TILT:
IP RATING:
DIMMABLE DRIVER INCLUDED.

8W
530LM
2700K
38°
25°
IP44


INKLUDERT DIMMBAR DRIVER/
INCLUDED DIMMABLE DRIVER.

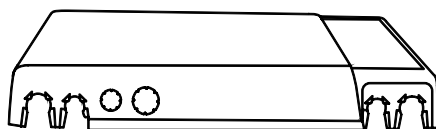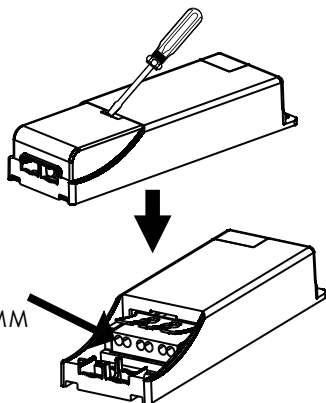



ART.: DOWNLIGHT BOX

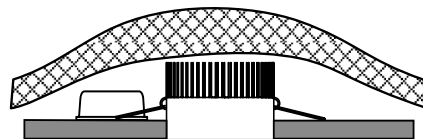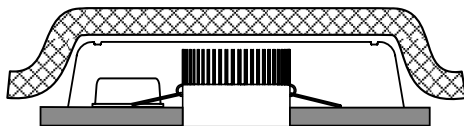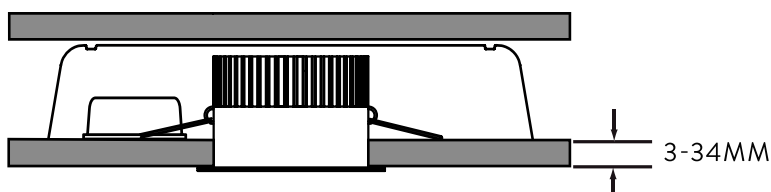


MÅL / MEASURES



CUT OUT : Ø83MM



MINIMUM DISTANCE TO FLAMMABLE
MATERIAL IN THE BEAM DIRECTION /
MINIMUM AVSTAND TIL BRENNBART
MATERIALE I ARMATURETS
STRÅLERETNING



IMPORTØR:
ELEKTRISK IMPORT AS
ETTERSTADGT.36 0658 OSLO
NORWAY

DISTRIBUTØR:
MEGAFLIS AS
BILLINGSTADSLETTA 14 1396 BILLINGSTAD
NORWAY